

# LED CONTINUOUS LIGHT

## PD 2100-M-AS-i



protection  
system






PD 2100-  
M-AS-i




Machine lights in an elegant pyramid design, equipped with LED light source for extremely long service life (>50,000 hrs).



- Vibration/shock-resistant.
- Low power consumption.
- Minimised maintenance costs.
- Non-compromising safety.
- Outstanding illumination of the coloured lens due to scattering lens.
- For safety-relevant applications, such as X-ray and laser equipment.
- Supplying of the light directly by bus system.
- Control and function monitoring directly via AS interface.

PRODUCT		PD 2100-M-AS-i	
DATA			
Rated voltage		28 V	
Nominal current consumption		approx. 250 mA	
Operating range		26.5–32.6 V	
Alarm output		via AS-i Bus	
Operating mode		continuous light	
Light source		LED	
Light intensity (DIN 5037) <small>clear lens</small>		5 cd	
Max. viewing distance		52 m	
Operating temperature		–25 °C ... +45 °C	
Storage temperature		–40 °C ... +70 °C	
Relative humidity		90 %	
Protection system (EN 60529)		IP 55 (if mounted vertically/horizontally) 	
Service life of the light source		>50,000 hrs	
Material	lens	 polycarbonate (PC)	
	housing	ABS, light grey similar to RAL 7035	
	baseplate	ABS, light grey similar to RAL 7035	
Type of connection		M12 plug connector, 4-pole	
	Pin 1	AS-i +	
	Pin 2	NC	
	Pin 3	AS-i –	
	Pin 4	NC	
Addressing socket		DC jack, Ø 1.3 mm  <div><div>AS-i +</div><div>AS-i –</div></div>	
AS-i specification		AS-i 2.1, A/B capable EN 50295	
Weight		300 g	

## DIMENSIONS

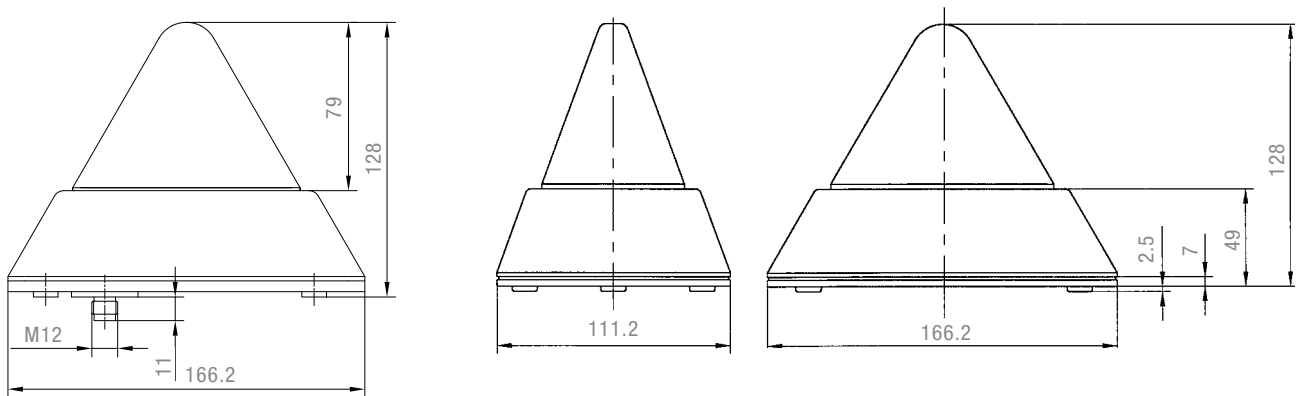


## MOUNTING HOLES

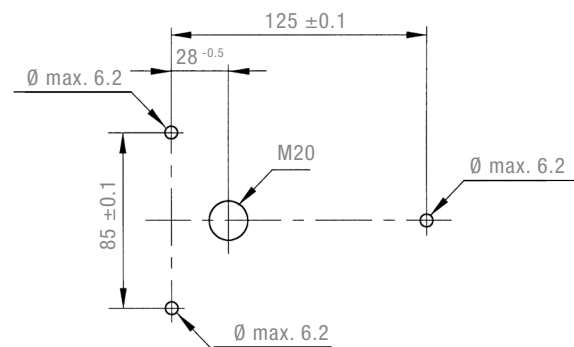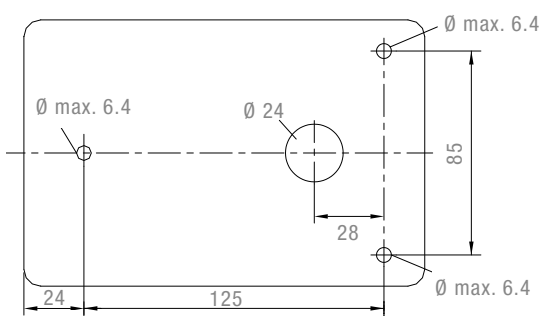

ARTICLE NO.	PD 2100-M-AS-i
LENS COLOUR	26.5–32.6 V
	21120502004
	21120505004

Article numbers for other colours on request.

## CONNECTION DIAGRAM

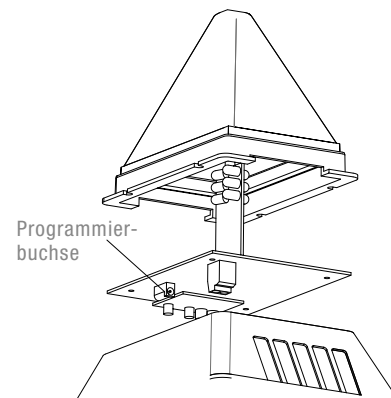

## OPTIONS/ACCESSORIES



Article no.  
28710500040

## CONFORMITY TO STANDARDS

The visual characteristics of continuous lights conform to the European standard DIN EN 842; **“Machine safety – visual alarm signals”**. Requirements contained in the DIN EN 981 standard; **“Machine safety – system of acoustic and visual alarm and information signals”**, can be fulfilled. The colours “red” for the emergency signal and “yellow” for the warning signal conform to the requirements of IEC 73 / DIN EN 60073 / VDE 0199; **“Coding of display devices and control elements using colours and supplementary means”**.

References to visual alarm devices can be found in the following standards:

EN 60825-1	Radiation safety of laser devices, identical to IEC 825 and DIN-VDE 0837
DIN EN 54	Fire alarm systems
DIN 54113-2	Radiation protection regulations for the technical operation of X-ray equipment up to 500 kV